




BASIN SPECIFICATION

Dignity



Cabinet range (refer to applicable cabinet specifications)











LONDON 50 RIVA CLASSIC CITY 46


Product Features	
Type of basin	Inset
Material of basin	Cherry Pie [®]
Capacity of basin	8 litre
Overflow Configuration	No overflow provided
Colour options	· White (Matte


- The basin must be sealed to the top with an acetic cured silicone sealant.
- Epoxy type sealants must not be used.

INDICATES TOP SURFACE ---

IMPORTANT NOTE: Throughout this guide, dimensions may vary by \pm 2mm. Please read the installation manual for detailed information on installing the product. St. Michel pursues a policy of continuing improvement in design and manufacturing of its products. The right is therefore reserved to vary specifications without notice. For full installation instructions visit stmichel.co.nz.

Date edited: 09 /







Cabinet range (refer to applicable cabinet specifications)









LONDON 50 RIVA CLASSIC

CITY 46

Top Thickness (mm)	Cherry Pie	
London	60	


- The top must be sealed to the vanity unit with an acetic cured silicone sealant. Epoxy type sealants must not be used
- Tops can be drilled on site with a standard hole saw
- For wall mounted taps we recommend using a 200mm wall mixer


Product Dimensions (mm)	A	B	©	D	E
London - 750	750	510	375	300	80
London - 750 (wall mounted tap)	750	510	375	255	-
London - 900	900	510	450	300	80
London - 900 (wall mounted tap)	900	510	450	255	-
London - 1200	1200	510	600	300	80
London - 1200 (wall mounted tap)	1200	510	600	255	-
London - 1500 - LH	1500	510	378	300	80
London - 1500 - LH (wall mounted tap)	1500	510	378	255	-
London - 1500 - RH	1500	510	1122	300	80
London - 1500 - RH (wall mounted tap)	1500	510	1122	255	-
London - 1800 - LH	1800	510	453	300	80
London - 1800 -LH (wall mounted tap)	1800	510	453	255	-
London - 1800 - RH	1800	510	1347	300	80
London - 1800 - RH (wall mounted tap)	1800	510	1347	255	-
INDICATED TOP OURSEASE					


INDICATES TOP SURFACE ---

IMPORTANT NOTE: Throughout this guide, dimensions may vary by \pm 2mm. Please read the installation manual for detailed information on installing the product. St. Michel pursues a policy of continuing improvement in design and manufacturing of its products. The right is therefore reserved to vary specifications without notice. For full installation instructions visit strnichel.co.nz.

Date edited: 09 / 0	2 / 2021
---------------------	----------









Cabinet range (refer to applicable cabinet specifications)









LONDON 50 RIVA CLASSIC

ACCIO OITO

Top Thickness (mm)	Cherry Pie	
Riva Classic	20.5	


- The top must be sealed to the vanity unit with an acetic cured silicone sealant. Epoxy type sealants must not be used
- Tops can be drilled on site with a standard hole saw
- For wall mounted taps we recommend using a 200mm wall mixer


Product Dimensions (mm)	A	B	©	(D)	E
Riva Classic - 750	750	460	375	265	50
Riva Classic - 750 (wall mounted tap)	750	460	375	230	-
Riva Classic - 900	900	460	450	265	50
Riva Classic - 900 (wall mounted tap)	900	460	450	230	-
Riva Classic - 900 - LH	900	460	340	265	50
Riva Classic - 900 - LH (wall mounted tap)	900	460	340	230	-
Riva Classic - 900 - RH	900	460	560	265	50
Riva Classic - 900 - RH (wall mounted tap)	900	460	560	230	-
Riva Classic - 1200	1200	460	600	265	50
Riva Classic - 1200 (wall mounted tap)	1200	460	600	230	-
Riva Classic - 1500	1500	460	750	265	50
Riva Classic - 1500 (wall mounted tap)	1500	460	750	230	-

INDICATES TOP SURFACE ---

IMPORTANT NOTE: Throughout this guide, dimensions may vary by \pm 2mm. Please read the installation manual for detailed information on installing the product. St. Michel pursues a policy of continuing improvement in design and manufacturing of its products. The right is therefore reserved to vary specifications without notice. For full installation instructions visit strnichel.co.nz.

Date edited:	09 / 02 / 2021
--------------	----------------







Cabinet range (refer to applicable cabinet specifications)









LONDON 50 RIVA CLASSIC

Top Thickness (mm)	Ē	Cherry Pie	HPL	
City 46		20.5	17.5	


- The top must be sealed to the vanity unit with an acetic cured silicone sealant. Epoxy type sealants must not be used
- Tops can be drilled on site with a standard hole saw
- For wall mounted taps we recommend using a 200mm wall mixer


Product Dimensions (mm)	A	B	©	(D)	E
City 46 - 700	700	460	350	265	50
City 46 - 700 (wall mount tap)	700	460	350	230	-
City 46 - 900	900	460	450	265	50
City 46 - 900 (wall mount tap)	900	460	450	230	-
City 46 - 1200	1200	460	600	265	50
City 46 - 1200 (wall mount tap)	1200	460	600	230	-

INDICATES TOP SURFACE --

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ± 2 mm. Please read the installation manual for detailed information on installing the product. St. Michel pursues a policy of continuing improvement in design and manufacturing of its products. The right is therefore reserved to vary specifications without notice. For full installation instructions visit stmichel.co.nz.

Date edited: 09 / 02 / 2021

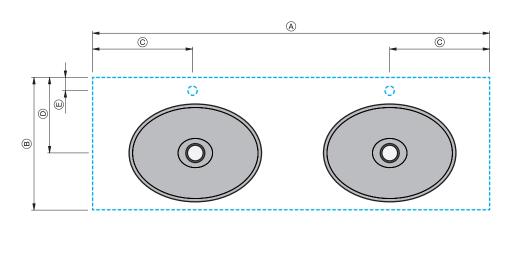





Cabinet range (refer to applicable cabinet specifications)









LONDON 50

RIVA CLASSIC	CIT
--------------	-----

London	60	
Riva Classic	20.5	
City 46	20.5	17.5

- The top must be sealed to the vanity unit with an acetic cured silicone sealant. Epoxy type sealants must not be used
- Tops can be drilled on site with a standard hole saw
- For wall mounted taps we recommend using a 200mm wall mixer

A	B	©	(D)	E
1500	510	378	300	80
1500	510	378	255	-
1800	510	453	300	80
1800	510	453	255	-
1200	460	300	265	50
1200	460	300	230	-
1400	460	350	265	50
1400	460	350	230	-
1200	460	300	265	50
1200	460	300	230	-
1500	460	375	265	50
1500	460	375	230	-
	1500 1500 1800 1800 1200 1200 1400 1200 1200 1500	1500 510 1500 510 1800 510 1800 510 1800 510 1200 460 1400 460 1400 460 1200 460 1200 460 1200 460	1500 510 378 1500 510 378 1800 510 453 1800 510 453 1200 460 300 1200 460 300 1400 460 350 1400 460 300 1200 460 300 1200 460 300 1500 460 375	1500 510 378 300 1500 510 378 255 1800 510 453 300 1800 510 453 255 1200 460 300 265 1200 460 300 230 1400 460 350 265 1400 460 350 230 1200 460 300 265 1200 460 300 230 1500 460 375 265

INDICATES TOP SURFACE -

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ± 2 mm. Please read the installation manual for detailed information on installing the product. St. Michel pursues a policy of continuing improvement in design and manufacturing of its products. The right is therefore reserved to vary specifications without notice. For full installation instructions visit stmichel.co.nz.

Date edited:	09 / 02 / 2021
--------------	----------------