




Cabinet range (refer to applicable cabinet specifications)




LONDON 50




RIVA CLASSIC





CITY 46



CITY 50







Product Features	
Type of basin	Vessel
Material of basin	Mineral Cast
Capacity of basin	5 litre
Overflow Configuration	Overflow not provided
Colour options	White Gloss

- The basin must be sealed to the top with an acetic cured silicone sealant.
- Epoxy type sealants must not be used.

TOP SPECIFICATION

Grace

Cabinet range (refer to applicable cabinet specifications)



LONDON 50



RIVA CLASSIC



CITY 46



Top Thickness (mm)	Ⓕ	Cherry Pie		
London		60		

- The top must be sealed to the vanity unit with an acetic cured silicone sealant. Epoxy type sealants must not be used
- Tops can be drilled on site with a standard hole saw
- For wall mounted taps we recommend using a 200mm wall mixer


Product Dimensions (mm)	Ⓐ	Ⓑ	Ⓒ	Ⓓ	Ⓔ
London - 750	750	510	375	300	80
London - 750 (wall mounted tap)	750	510	375	255	-
London - 900	900	510	450	300	80
London - 900 (wall mounted tap)	900	510	450	255	-
London - 1200	1200	510	600	300	80
London - 1200 (wall mounted tap)	1200	510	600	255	-
London - 1500 - LH	1500	510	378	300	80
London - 1500 - LH (wall mounted tap)	1500	510	378	255	-
London - 1500 - RH	1500	510	1122	300	80
London - 1500 - RH (wall mounted tap)	1500	510	1122	255	-
London - 1800 - LH	1800	510	453	300	80
London - 1800 - LH (wall mounted tap)	1800	510	453	255	-
London - 1800 - RH	1800	510	1347	300	80
London - 1800 - RH (wall mounted tap)	1800	510	1347	255	-

INDICATES TOP SURFACE -----

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ± 2 mm. Please read the installation manual for detailed information on installing the product. St. Michel pursues a policy of continuing improvement in design and manufacturing of its products. The right is therefore reserved to vary specifications without notice. For full installation instructions visit stmichel.co.nz.

Date edited: 09 / 02 / 2021

02 / 05

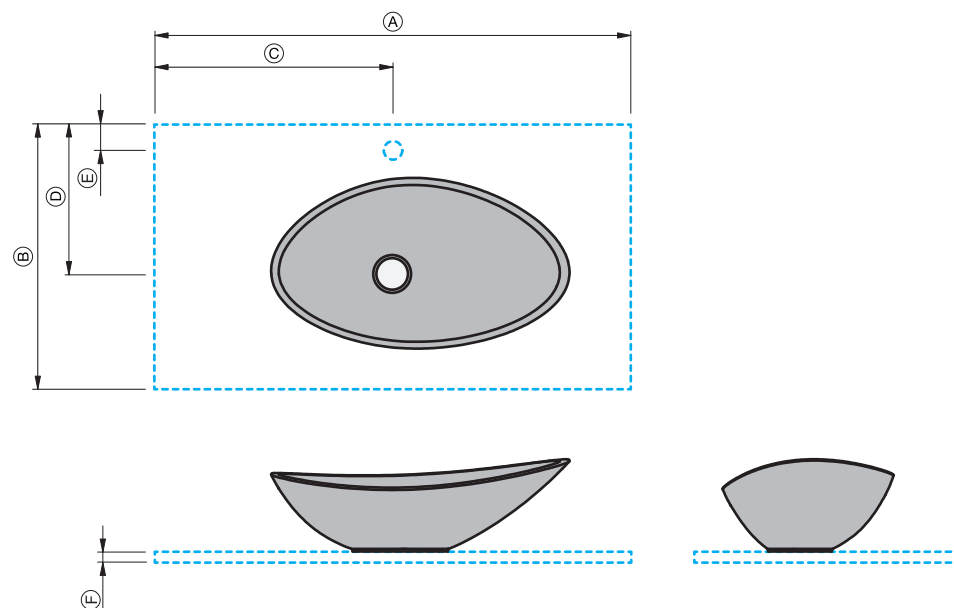

TOP SPECIFICATION

Grace

Cabinet range (refer to applicable cabinet specifications)



LONDON 50 RIVA CLASSIC CITY 46

Top Thickness (mm)	F	Cherry Pie		
Riva Classic		20.5		

- The top must be sealed to the vanity unit with an acetic cured silicone sealant. Epoxy type sealants must not be used
- Tops can be drilled on site with a standard hole saw
- For wall mounted taps we recommend using a 200mm wall mixer


Product Dimensions (mm)	A	B	C	D	E
Riva Classic - 750	750	460	375	300	55
Riva Classic - 750 (wall mount tap)	750	460	375	230	-
Riva Classic - 900	900	460	450	300	55
Riva Classic - 900 (wall mount tap)	900	460	450	230	-
Riva Classic - 900 - LH	900	460	340	300	55
Riva Classic - 900 - LH (wall mount tap)	900	460	340	230	-
Riva Classic - 900 - RH	900	460	560	300	55
Riva Classic - 900 - RH (wall mount tap)	900	460	560	230	-
Riva Classic - 1200	1200	460	600	300	55
Riva Classic - 1200 (wall mount tap)	1200	460	600	230	-
Riva Classic - 1500	1500	460	750	300	55
Riva Classic - 1500 (wall mount tap)	1500	460	750	230	-

INDICATES TOP SURFACE -----

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ± 2 mm. Please read the installation manual for detailed information on installing the product. St. Michel pursues a policy of continuing improvement in design and manufacturing of its products. The right is therefore reserved to vary specifications without notice. For full installation instructions visit stmichel.co.nz.

Date edited: 09 / 02 / 2021

03 / 05

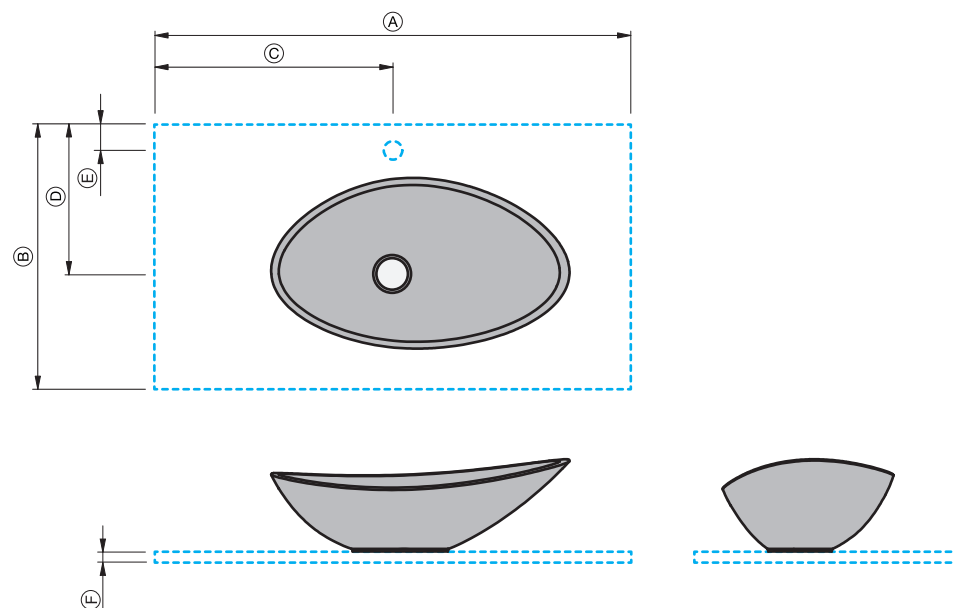

TOP SPECIFICATION

Grace

Cabinet range (refer to applicable cabinet specifications)



LONDON 50



RIVA CLASSIC



CITY 46



Top Thickness (mm)	F	Cherry Pie	HPL
City 46		20.5	17.5

- The top must be sealed to the vanity unit with an acetic cured silicone sealant. Epoxy type sealants must not be used
- Tops can be drilled on site with a standard hole saw
- For wall mounted taps we recommend using a 200mm wall mixer

Product Dimensions (mm)	A	B	C	D	E
City 46 - 700	700	460	350	300	55
City 46 - 700 (wall mount tap)	700	460	350	230	-
City 46 - 900	900	460	450	300	55
City 46 - 900 (wall mount tap)	900	460	450	230	-
City 46 - 1200	1200	460	600	300	55
City 46 - 1200 (wall mount tap)	1200	460	600	230	-


INDICATES TOP SURFACE -----

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ± 2 mm. Please read the installation manual for detailed information on installing the product. St. Michel pursues a policy of continuing improvement in design and manufacturing of its products. The right is therefore reserved to vary specifications without notice. For full installation instructions visit stmichel.co.nz.

Date edited:

09 / 02 / 2021

04 / 05

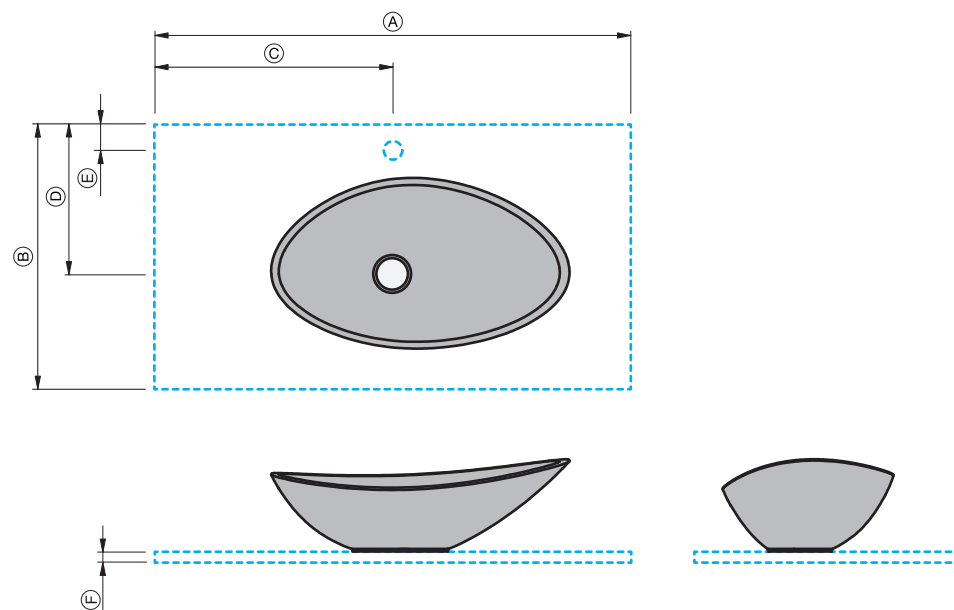

TOP SPECIFICATION

Grace

Cabinet range (refer to applicable cabinet specifications)



LONDON 50



RIVA CLASSIC



CITY 46



Top Thickness (mm)	Ⓕ	Cherry Pie	HPL
London		60	
City 46		20.5	17.5
Riva Classic		20.5	

- The top must be sealed to the vanity unit with an acetic cured silicone sealant. Epoxy type sealants must not be used
- Tops can be drilled on site with a standard hole saw
- For wall mounted taps we recommend using a 200mm wall mixer

Product Dimensions (mm)	Ⓐ	Ⓑ	Ⓒ	Ⓓ	Ⓔ
City 46 - 1200 - DB	1200	460	300	300	55
City 46 - 1200 - DB (wall mount tap)	1200	460	300	230	-
City 46 - 1400 - DB	1400	460	350	300	55
City 46 - 1400 - DB (wall mount tap)	1400	460	350	230	-
Riva Classic - 1200 - DB	1200	460	300	300	55
Riva Classic - 1200 - DB (wall mounted tap)	1200	460	300	230	-
Riva Classic - 1500 - DB	1500	460	375	300	55
Riva Classic - 1500 - DB (wall mounted tap)	1500	460	375	230	-
London - 1500 - DB	1500	510	378	300	80
London - 1500 - DB (wall mounted tap)	1500	510	378	255	-
London - 1800 - DB	1800	510	453	300	80
London - 1800 - DB (wall mounted tap)	1800	510	453	255	-

INDICATES TOP SURFACE -----

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ± 2 mm. Please read the installation manual for detailed information on installing the product. St. Michel pursues a policy of continuing improvement in design and manufacturing of its products. The right is therefore reserved to vary specifications without notice. For full installation instructions visit stmichel.co.nz.

Date edited:

09 / 02 / 2021

05 / 05

