

# st.michel KAYLA CHERRY PIE



## SPECIFICATIONS

<b>Recommended Use</b>	Domestic, Hotel and Commercial
<b>Vanity Top Material</b>	Cherry Pie Solid Surface
<b>Vanity Unit Material</b>	MDF E0 (Medium Density Fibreboard, Rated Emission Level E0) PB E1 (Partical Board, Rated Emission Level E1)
<b>Vanity Colour Variations</b>	<b>Textured Woodgrain With Aqua Edge®</b> Devon Oak, Premium Oak, Smoked Ash, Vintage Ash, Classic Walnut, Southern Oak, Black Wilderness, Charred Oak, Baroque, Blackened Teak, Hamptons Elm, Sovereign Oak <b>White With Aqua Edge®</b> White Velvet <b>See swatches instore for all finishes</b>
<b>Basins</b>	<b>FINECERAMIC®</b> Roca Inspira Round. Roca Inspira Square. Roca Inspira Soft
<b>Cabinet Interior</b>	Matches Exterior
<b>Tap Hole availability</b>	<ul style="list-style-type: none"> <li>• Taphole Centred behind basin</li> <li>• No taphole basin positioned for bench mounted tap</li> <li>• No taphole basin positioned for wall mounted tap</li> </ul>
<b>Handle</b>	Zero handle. Finger pull
<b>Drawers</b>	Hettich Innotech Soft-close drawer system. Limited life time warranty. Made in Germany.
<b>Waste</b>	Supplied separately
<b>Fixing</b>	Bolted/Screwed to the wall by a licensed trades person. Refer installation instructions.



To see the complete Kayla range go to [www.reece.co.nz/bathrooms](http://www.reece.co.nz/bathrooms)

VARIATIONS	900 Centre	900L Offset	900R Offset	1200 Centre	1200L Offset	1200R Offset	1200DB Double	1500DB Double
<b>Width -Top (mm)</b>	900	900	900	1200	1200	1200	1200	1500
<b>Depth - Top (mm)</b>	500	500	500	500	500	500	500	500
<b>Width - Cabinet (mm)</b>	894	894	894	1194	1194	1194	1194	1494
<b>Depth - Cabinet (mm)</b>	496	496	496	496	496	496	496	496
<b>Height - Cabinet (mm)</b>	400	400	400	400	400	400	400	400
<b>Number of Drawers</b>	1	1	1	1	1	1	2	2

## CLEANING RECOMMENDATIONS

This bathroom product should not be cleaned with abrasive materials eg. steel wool/scourers. Do not use any corrosive or abrasive cleaning agents containing acids or scouring agents. To maintain finish use only a soft cloth or weak solution of non-abrasive detergent. Bleaches can discolour products and therefore should not be used. Damage caused by any improper treatment is not covered by the product warranty - refer to Warranty Conditions on the last page.

Disclaimer: Products in this specification manual must by regulation be installed by licensed and registered trade people. The manufacturer/distributor reserves the right to vary specifications or delete models from their range without prior notification. All dimensions are nominal. Set-outs listed are correct at time of publication however the manufacturer/distributor takes no responsibility for printing errors.

Tech Page Version 1


September 2023



# st.michel **KAYLA CHERRY PIE**

## **CHERRY PIE PREMIUM SOLID SURFACE 20MM**


Manufactured using 100% acrylic solid surface material.  
Developed to withstand heat, chemicals, moisture, and impact, and to resist stains better than natural stone surfaces.  
Non-porous, hygienic, easy to clean, maintain and repair

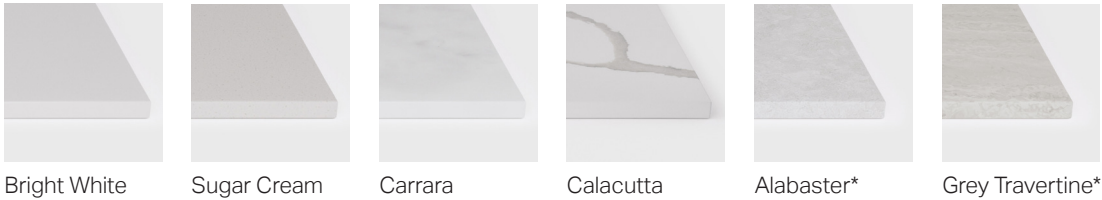

**\*Alabaster and Grey Travertine available from late November.**

## **MELAMINE FINISHES**

**Textured Woodgrains With Aqua Edge®**

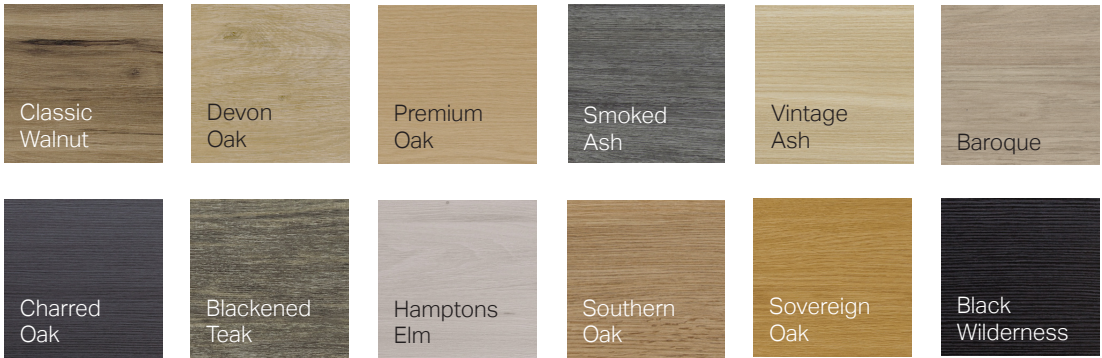

**White With Aqua Edge®**





**See swatches instore for all finishes**





st.michel **KAYLA CHERRY PIE**

**KAYLA CHERRY PIE VANITY SPECIFICATION**



**304 KAYLA CHERRY PIE 900**

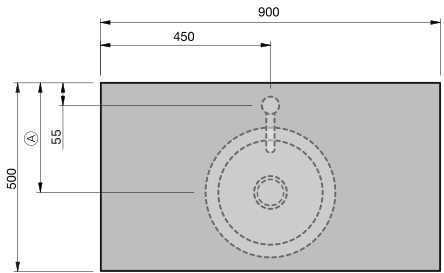



Ⓐ Measurement  
When basin is positioned  
for bench mounted tap 280mm  
When basin is positioned  
for wall mounted tap 250mm

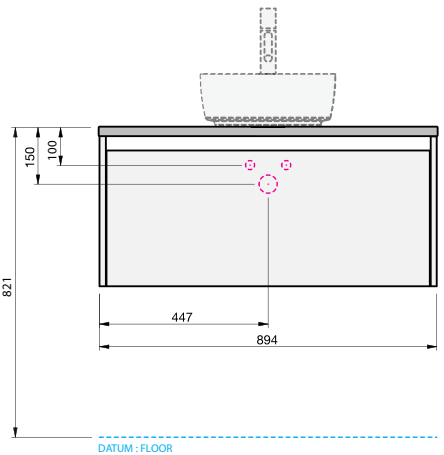

**305 KAYLA VESSEL 900L**

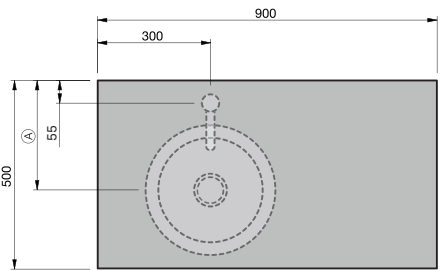



Ⓐ Measurement  
When basin is positioned  
for bench mounted tap 280mm  
When basin is positioned  
for wall mounted tap 250mm


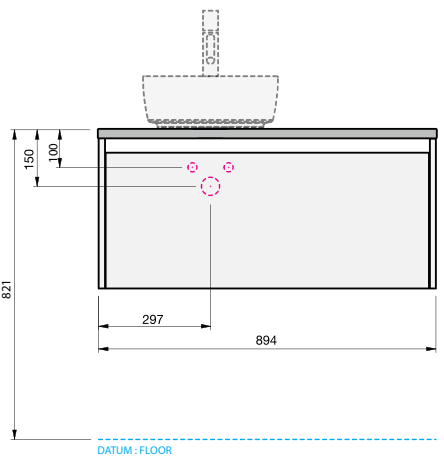


**KAYLA CHERRY PIE VANITY SPECIFICATION**



**306 KAYLA VESSEL 900R**

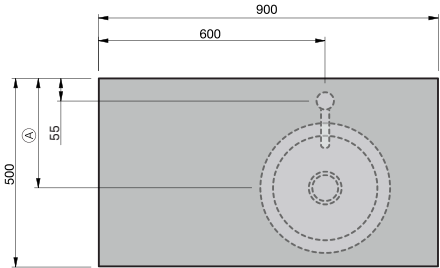



**(A) Measurement**  
When basin is positioned  
for bench mounted tap 280mm  
When basin is positioned  
for wall mounted tap 250mm

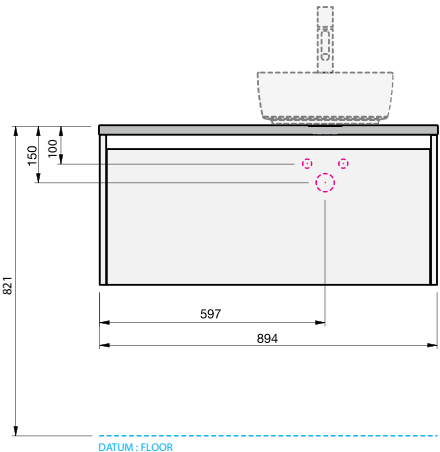

**307 KAYLA VESSEL 1200**

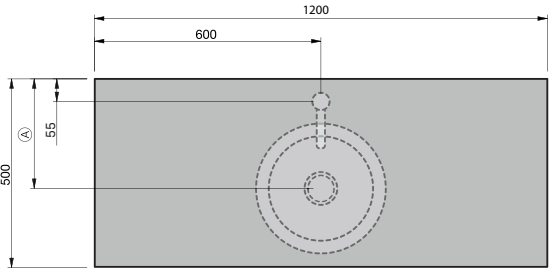

**(A) Measurement**  
When basin is positioned  
for bench mounted tap 280mm  
When basin is positioned  
for wall mounted tap 250mm

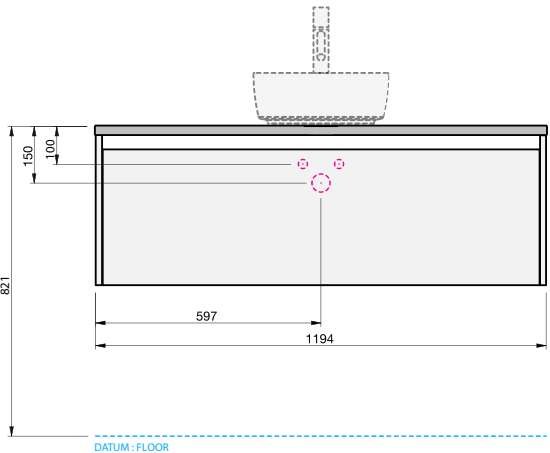





st.michel **KAYLA CHERRY PIE**

**KAYLA CHERRY PIE VANITY SPECIFICATION**

**310 KAYLA VESSEL 1200DB**

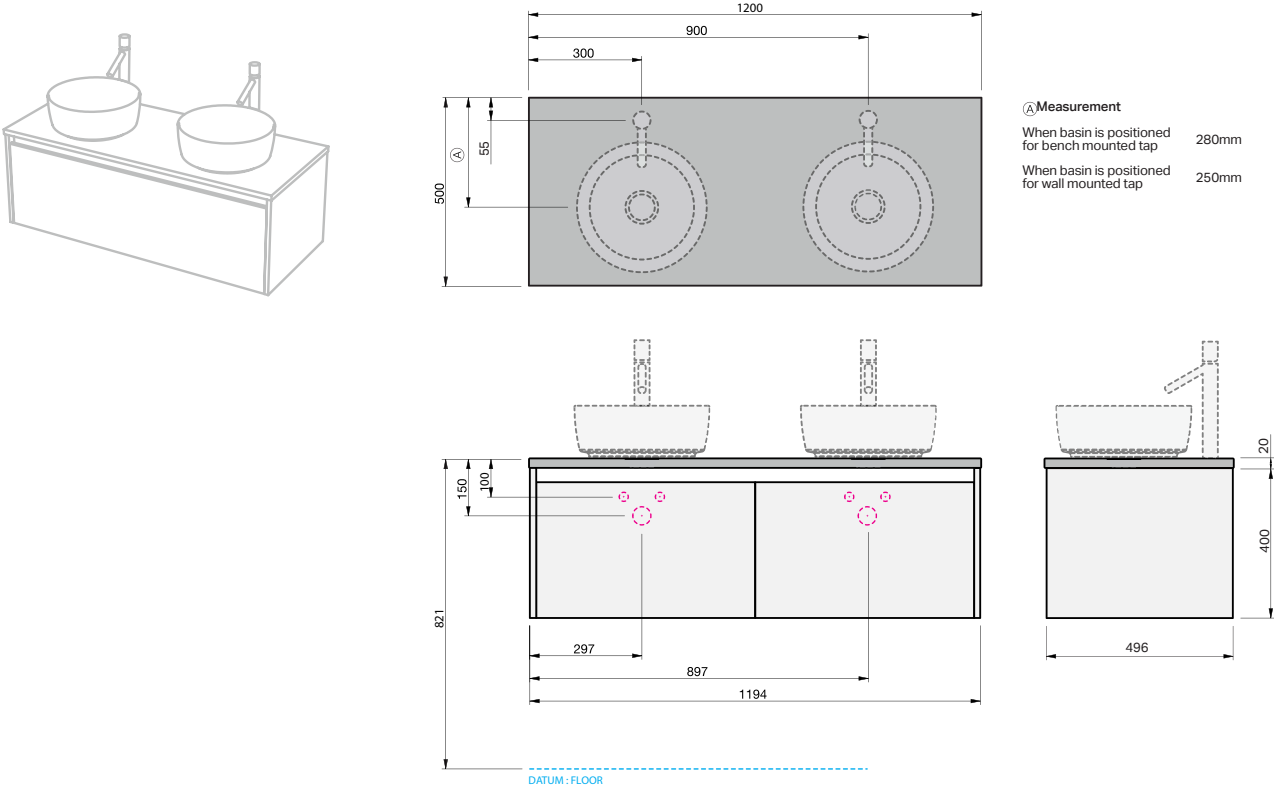


**311 KAYLA VESSEL 1500DB**

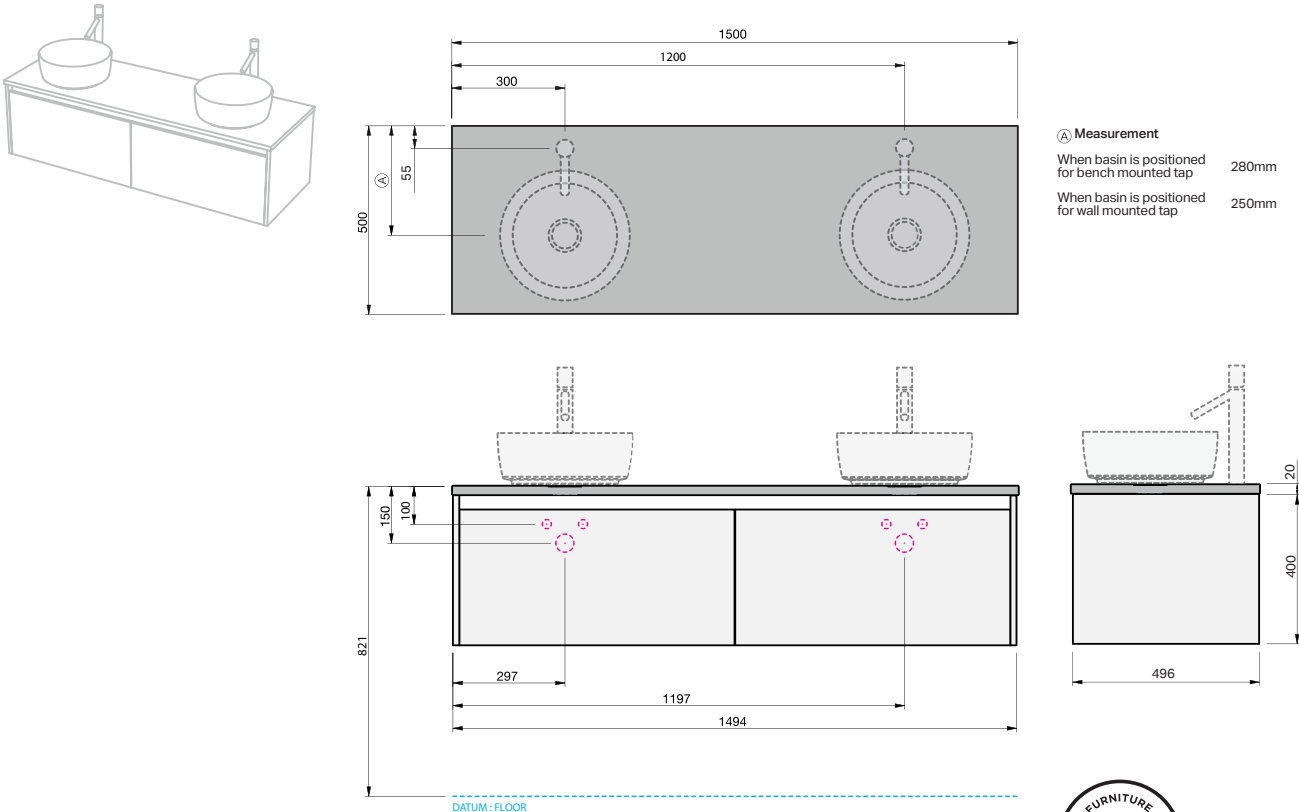



st.michel **KAYLA CHERRY PIE**

**KAYLA VESSEL BASIN SPECIFICATION**



**ROCA INSPIRA ROUND VESSEL**

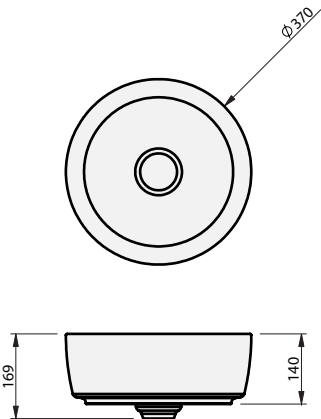

**ROCA INSPIRA SOFT VESSEL**

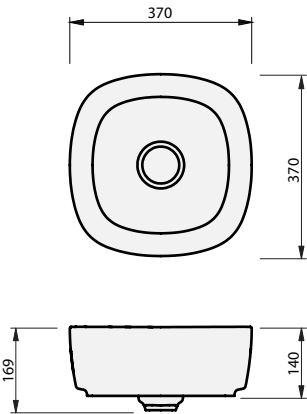


**ROCA INSPIRA SQUARE VESSEL**

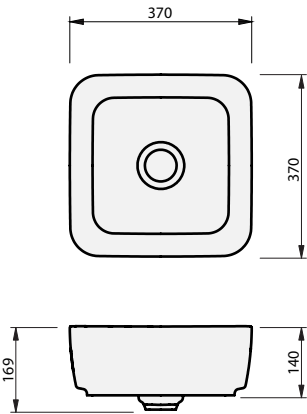

## INSTALLATION INSTRUCTIONS


### IMPORTANT: PLEASE READ PRIOR TO INSTALLATION

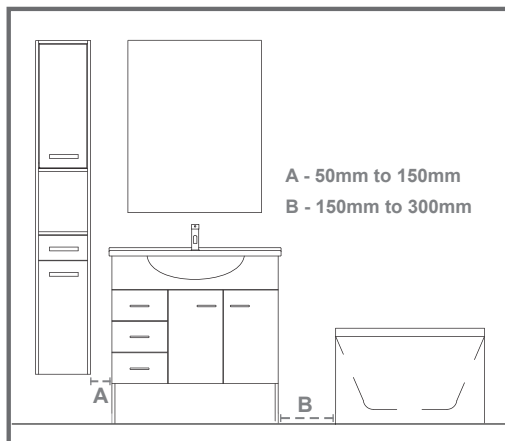

#### Positioning & Ventilation


- Furniture must be at least 150mm away from any wet areas
- Do not expose furniture to shower spray
- It is important that your bathroom is adequately ventilated to eliminate moisture build up. High humidity will lead to permanent dampness and mould resulting in deterioration of the materials in your bathroom.

Refer to [stmichel.co.nz](http://stmichel.co.nz) for more positioning and clearance guides

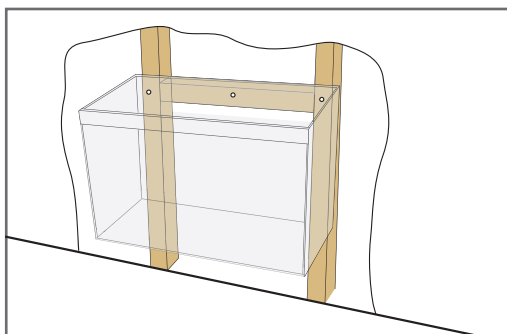

#### 1. Check Support Nogs


Wall hung furniture and wall hung ceramic basins require fixing to support nogs fitted between the studs, as detailed, to give a solid wall backing to attach the vanity. If necessary fix additional support nogs at desired height for cabinet and basin fixing. Ensure total width of support nog exceeds vanity width.

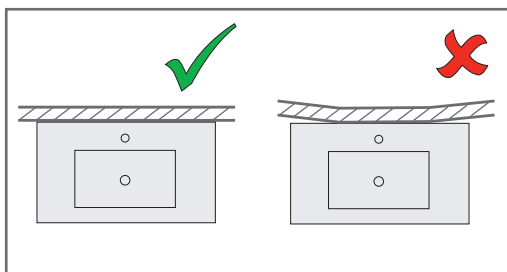

#### 2. Check for Plumb Walls and Level Floors


Ensure the Wall is plumb and straight, ensure floor is level. If you fix the product to a non-plumb wall or floor the following could happen:

- Your door or drawers will not operate correctly
- Door or drawer adjustments will not align.
- Basins will not sit level, which may cause water to pool or not drain properly

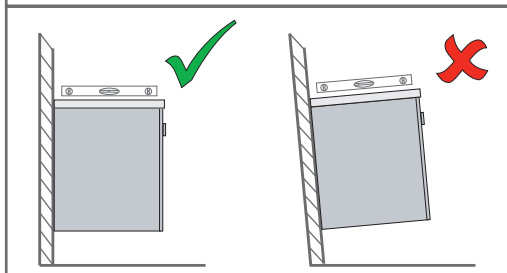

If it is not possible to make the wall or floor plumb and straight you must pack the vanity out so that it does not follow the out of aligned wall.

Floor standing vanities must sit on a level floor or be packed so they sit level and true.

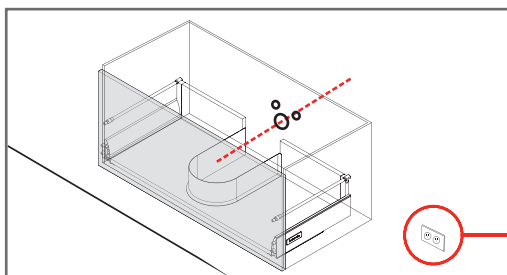

#### 3. Check plumbing positions align with product interior configurations.


Note: If your product has any electrical fittings please allow for this and talk to your electrician

Plumbers, please ensure a copy of the installation instructions is left with the end user for future reference




## INSTALLATION INSTRUCTIONS

### PREPARING THE CABINET

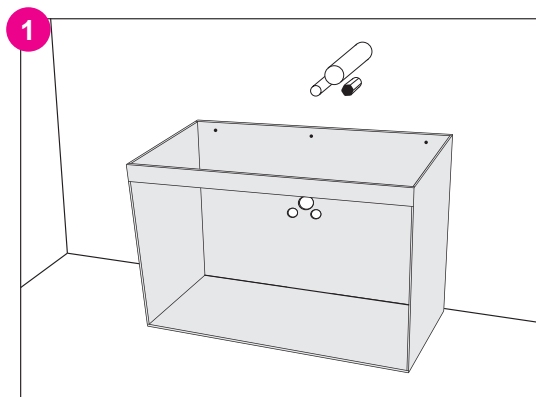


Remove doors & drawers and drill holes for plumbing in the back panel and/or base of the cabinet with an appropriate sized hole saw. Pre-drill screw locations for fastening to wall in step 4

### MEASURING UP

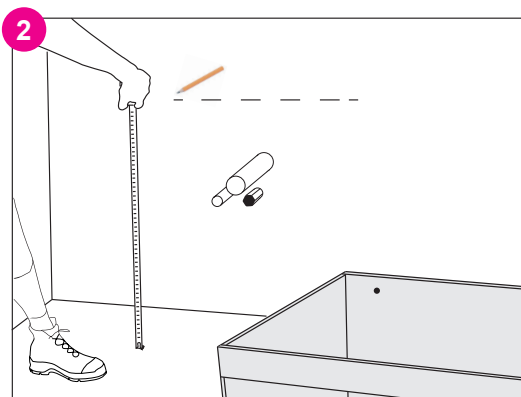


Mark the position of the top of the vanity - factor in the top/ basin thickness to get the correct height. Use a single screw in center of vanity to hold it in place.

### LEVELING UP

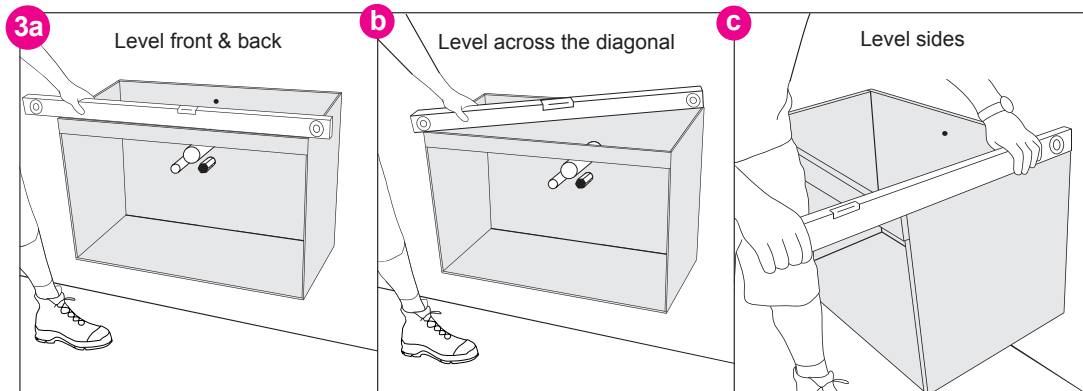

Note: Floor standing vanities should likewise, be checked for sitting level plumb and square and suitably packed to achieve this. Fix to the wall to secure either through the back rail or back panel.

### SECURING THE CABINET

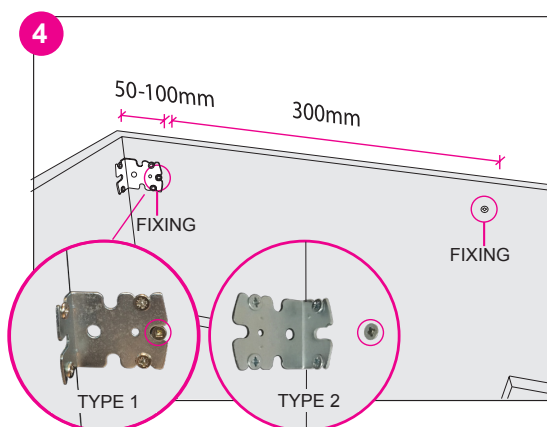


Securely fasten cabinet to wall through the back, no further than 100mm from each side of the cabinet. Upper fixings should be no lower than 50mm from the top of the back. Where possible, fasten cabinet through steel bracket in the top corner of the unit. Note: For cabinets over 900 wide you must provide additional fixing points evenly spaced at 300mm.

Plumbers, please ensure a copy of the installation instructions is left with the end user for future reference


## INSTALLATION INSTRUCTIONS

### CHERRY PIE TAPHOLE CUTTING


Only applies if you have a vanity with Cherry Pie Solid Surface Top

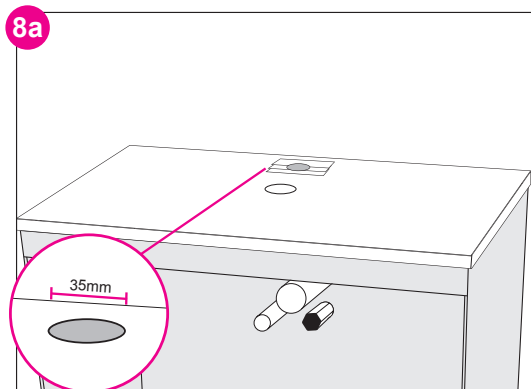


Decide on the location of your taphole and measure out position. Tapholes should be drilled with a sharp Bi-metal hole saw. The drilling is done in three steps. Cover the area you plan to drill with masking tape. Drill a pilot hole through the counter top at your center point. This hole should be just slightly smaller than the size of the pilot bit of your hole saw.

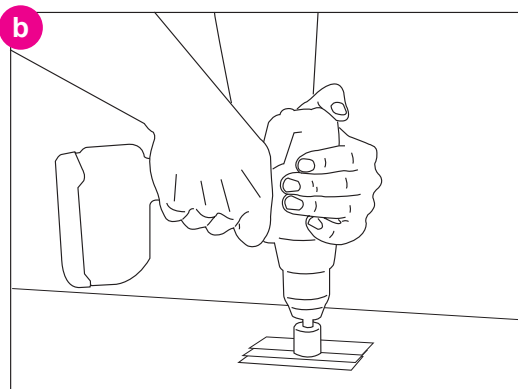

Using this hole as a guide, use a sharp hole saw to cut the hole to 35mm for a standard taphole size.  
Note: Use a very sharp hole saw to prevent damage to your top.  
Keep the drill speed moderately low, apply enough power to keep the hole saw cutting at an even rate.

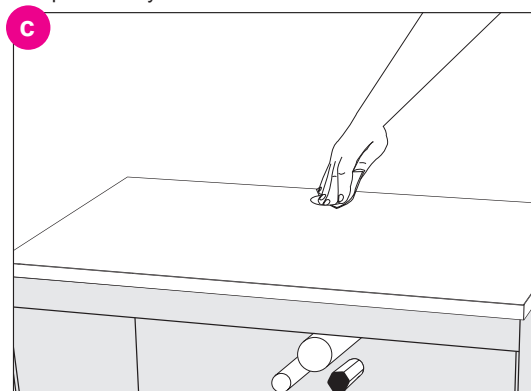


Remove tape & sand the edges of the holes with 240 grit to remove any sharp edges.  
Note: avoid sanding the top surface as this may cause scratching.

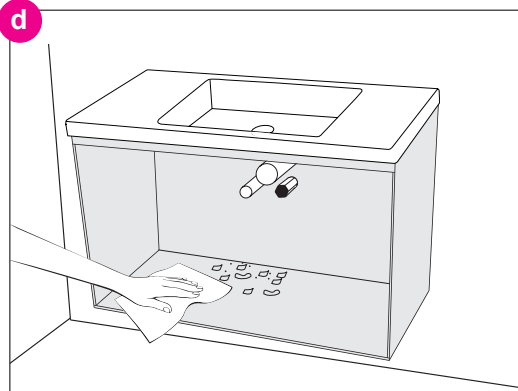


Clean away all building residue from the cabinet. Take care to dry any spillage or leakage of water on or inside the cabinet during installation.  
Note: Ensure drawer runners are free of building residue as this may effect the operation.

### SEALING

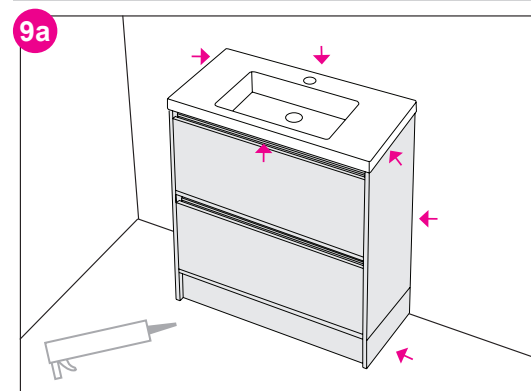

Apply silicone on the seam between the edge of the vanity top and the wall, smooth the bead, and allow to cure before use. Materials used for the construction of this unit are water resistant and not waterproof. A bead of sealant (specifically formulated for bathrooms) must be used to seal edges where water penetration can occur i.e. Between the basin and the cabinet and between the wall and the floor.

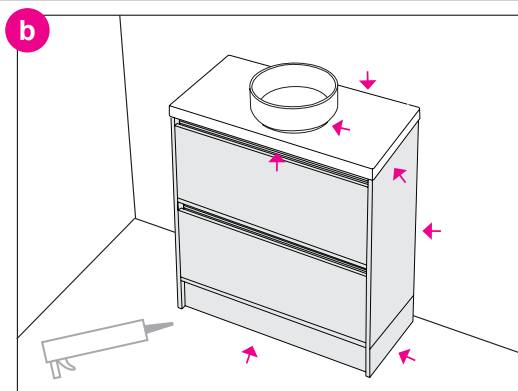

When sealing a vessel or semi inset basin it is important to put a bead of silicone around the edge where the basin meets the top. As well as where the top meets the wall.

Plumbers, please ensure a copy of the installation instructions is left with the end user for future reference


# st.michel KAYLA CHERRY PIE

## INSTALLATION INSTRUCTIONS


### 4.1 DRAWER INSTALLATION & ALIGNMENT | A-TYPE DRAWER

Note: A-type drawer could have a round or square gallery rail

#### REMOVING DRAWER

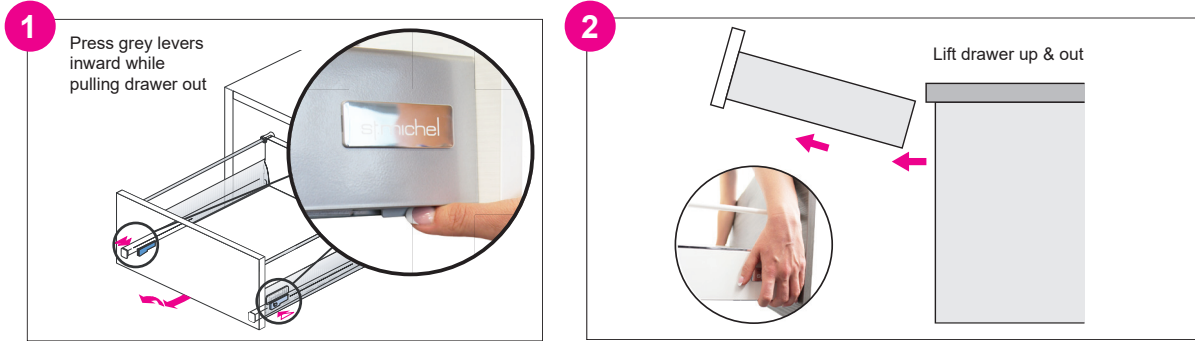


#### INSERTING DRAWER

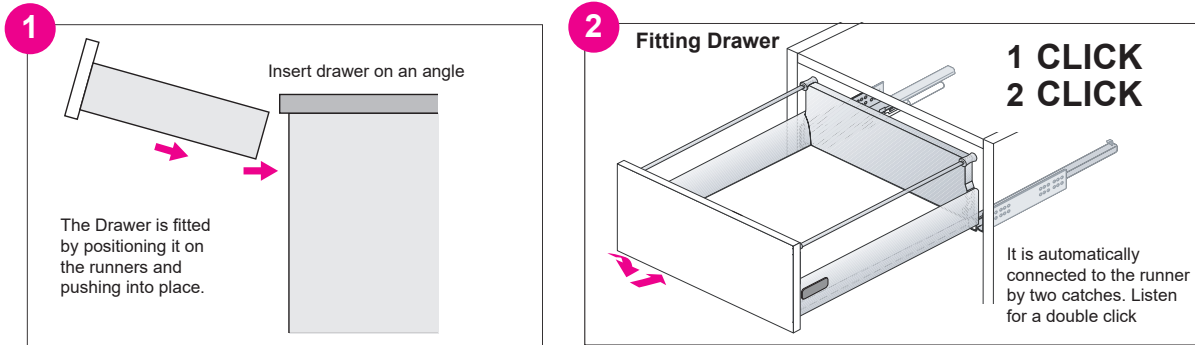

#### ADJUSTMENT

Adjust drawer front as required

**Warning:** Avoid pushing the blue button - this will cause the drawer front panel to detach

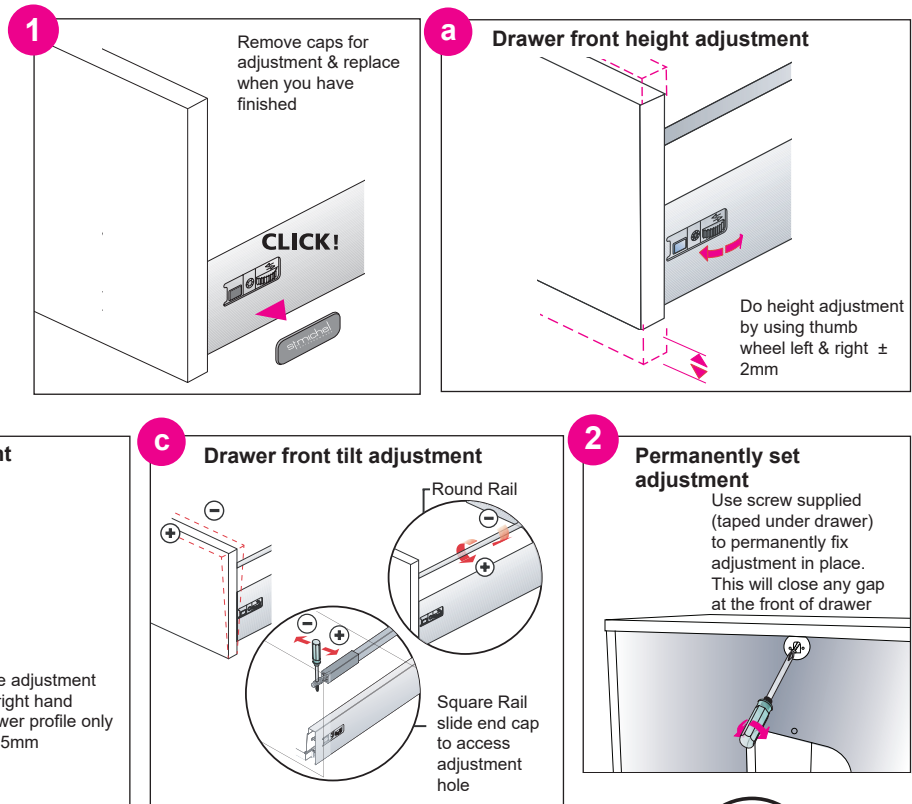

# st.michel **KAYLA CHERRY PIE**

## KAYLA PRODUCT WARRANTY

**Residential** Furniture 5 years Cherry Pie Top 10 years

**Commercial** Furniture 1 year Cherry Pie Top 1 year

### SUBJECT TO CONDITIONS OF USE

St Michel warrants that in the manufacture and supply of its products only high quality materials and workmanship have been used.

If within the warranty period there should be a fault with either materials or workmanship St Michel will either (at its sole discretion) repair or replace or refund (up to the original purchase price of the product).

Costs incurred in removing the defective product and installing the replacement product remain the responsibility of the purchaser.

This guarantee does not cover damage by improper installation, abuse, accident, misuse, excessive wear and tear, negligence, neglect, natural causes eg: water and sunlight, improper care and maintenance, water temperatures in excess of 55°C, humidity and other environmental conditions.

St Michel warranty applies from the date of purchase. Proof of the purchase date needs to be produced by the purchaser when making a claim.

### CARE AND CONDITIONS OF USE

St Michel products are produced from materials that are well suited to the bathroom. It is, however important that your bathroom is adequately ventilated to eliminate moisture build up. High humidity will lead to permanent dampness and mould resulting in a deterioration of the materials in your bathroom. If you cannot identify basin or cabinet material used on your product, please contact your merchant or see the product information at [www.stmichel.co.nz](http://www.stmichel.co.nz). For more detailed material information & specifications see [www.stmichel.co.nz](http://www.stmichel.co.nz)

### VANITY TOPS

St Michel vanity tops and wash basins are manufactured from the finest materials and when treated with care will last for many years. Do not subject the wash basin or vanity top to water at a temperature above 55°C. Never use aggressive cleaning agents which contain strong solvents such as acid, chlorine, ammonia, drain cleaner, caustic soda, isopropyl alcohol or abrasive agents. Carefully read the cleaner product label to ensure the cleaner is safe for use on the material. Lime scale marks may be reduced by regular cleaning of the washbasin. Keep high heat away from the vanity top or wash basin and avoid metal or other sharp objects which could scratch and damage the surface.

\*Handy Tip – Stubborn lime scale marks can normally be removed using a solution of vinegar and water

To clean your vanity top simply wipe with a damp cloth after each use. For regular cleaning, we recommend using a soft cloth, wrung in hot water with a mild all-purpose cleaning agent. Then wipe clean with a damp cloth wrung in clean water to remove the cleaning agent and to avoid stains and stripes. For more help in removing stubborn stains and scratches refer to our product videos at [www.stmichel.co.nz](http://www.stmichel.co.nz)

Cherry Pie® Bench-top Surfaces, Cherry Pie Matte Basins & Matte Top Solid Basins

For routine care & cleaning, Cherry pie® does not require any specialist cleaning regimes, most dirt and light residue will easily wipe off with a damp cloth and soapy water. The bench top should be rinsed with clean water and wiped dry. Acrylic surfaces such as Cherry Pie® are designed to develop an aged patina created by minor scratching. Regular cleaning or an abrasive cleaner will remove any light scuff marks and assist in developing and aged patina.

Heat - Cherry Pie® unlike marble will withstand high temperatures however sudden heat or prolonged direct heat will cause damage. To prevent damage do not place heat generating devices directly onto bench top or set close to bench top for extended periods.

Staining - Cherry Pie®, unlike marble and granite, is non porous and will resist most household chemicals such as cosmetics, however, some chemicals and strong dyes can cause damage and discolouration. If spillage occurs, wipe up immediately and rinse area thoroughly.

Minor Scratching Cherry Pie® - Take care with sharp household utensils and ceramic accessories (particularly unglazed bases, avoid sliding) These can sometimes cause scratches that will be more evident on darker Cherry Pie® bench tops. More serious scratches can be removed by a professional using an orbital sander and then re-polishing to restore.

### CABINETS

St Michel cabinets are manufactured from high quality, locally sourced materials. These materials are water resistant and not water proof. To ensure the long life of the cabinet, water must not be allowed to remain on the cabinet surfaces. All water spillages, leaks or flooding in or around the cabinet must be sponged off and dried immediately. Keep heat away from the cabinetry and avoid metal or other sharp objects which could scratch and damage the surface. Do not use abrasive cleaning agents which contain ammonia, bleach or other strong solvents. We also advise against the use of furniture polish, acetone, ethanol, benzene and coarse cleaning sponges. Carefully read the cleaner product label to ensure the cleaner is safe for use on the material.

For regular cleaning, we recommend cleaning with a soft cloth, wrung in hot water with a mild all-purpose cleaning agent. Cabinetry with structured surfaces is best cleaned along the structure to remove any dirt. Wipe clean with a damp cloth wrung in clean water to remove the cleaning agent and to avoid stains and stripes. For more help in removing stubborn stains refer to our product videos at [www.stmichel.co.nz](http://www.stmichel.co.nz)

### CLAIM PROCEDURE

For all warranty queries customers are to contact the branch where the product was purchased. These details can be found on your purchase invoice

**Don't risk it, use a licensed plumber.™**

