

Misura 50

TOP SPECIFICATION


Top Thickness (mm) [Ⓕ]

| Cabinet | Cherry Pie | HPL |
|-----------|------------|------|
| Misura 50 | 20.5 | 17.5 |

Product Dimensions (mm)

| | Ⓐ | Ⓑ | Ⓒ | Ⓓ | Ⓔ |
|------------------|------|-----|---|---|---|
| Misura 50 - 750 | 750 | 505 | - | - | - |
| Misura 50 - 900 | 900 | 505 | - | - | - |
| Misura 50 - 1200 | 1200 | 505 | - | - | - |

- The top must be sealed to the vanity unit with an acetic cured silicone sealant. Epoxy type sealants must not be used
- Tops can be drilled on site with a standard hole saw

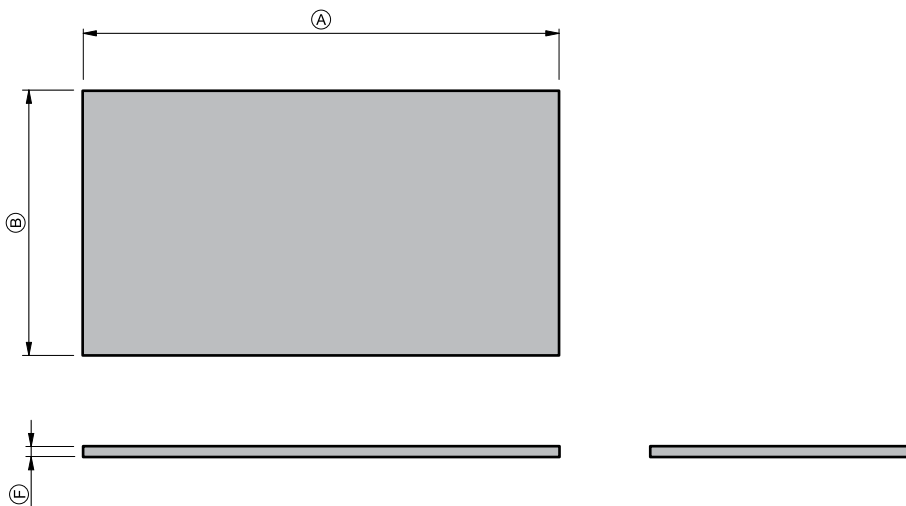

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ± 2 mm. Please read the installation manual for detailed information on installing the product. St. Michel pursues a policy of continuing improvement in design and manufacturing of its products. The right is therefore reserved to vary specifications without notice.

st.michel
BATHROOMWARE

phone (09) 837 4276 email info@stmichel.co.nz stmichel.co.nz