


Lulu 46

TOP SPECIFICATION

Top Thickness (mm) ^(F)					
Cabinet	Cherry Pie	HPL			
Lulu 46	20.5	17.5			

[illegible]

- The top must be sealed to the vanity unit with an acetic cured silicone sealant. Epoxy type sealants must not be used
- Tops can be drilled on site with a standard hole saw

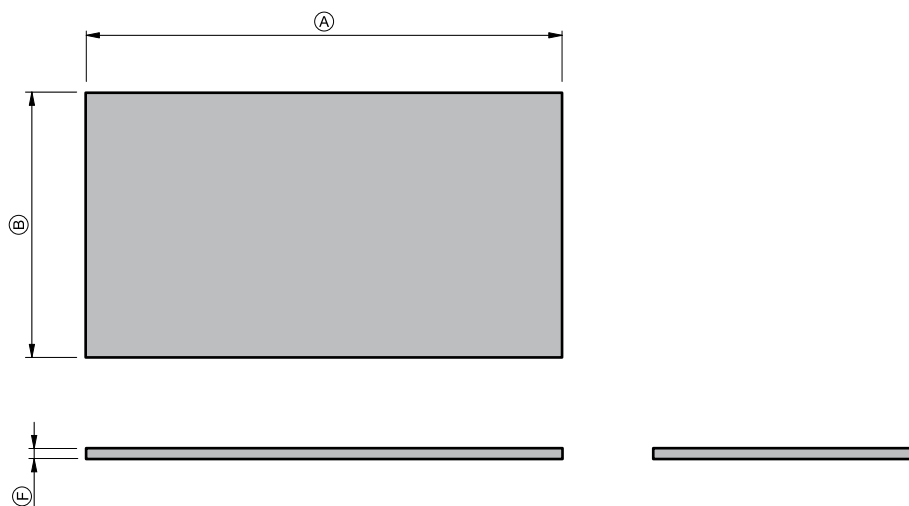

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ± 2 mm. Please read the installation manual for detailed information on installing the product. St. Michel pursues a policy of continuing improvement in design and manufacturing of its products. The right is therefore reserved to vary specifications without notice.

st.michel
BATHROOMWARE

phone (09) 837 4276 **email** sales@stmichel.co.nz **stmichel.co.nz**