



Back Cable Exit Position
Cable Length 300mm

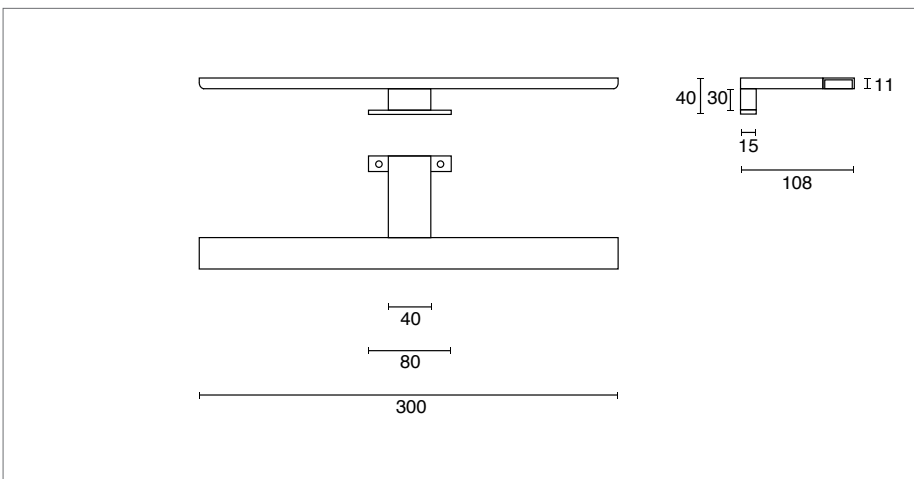

Daylight 300 – 9613

CABINET VERSION


Daylight 300 -
Chrome on Aluminium
5W LED 240V IP44
4000k Natural White Light
Integrated Controller/Driver
(no transformer required)

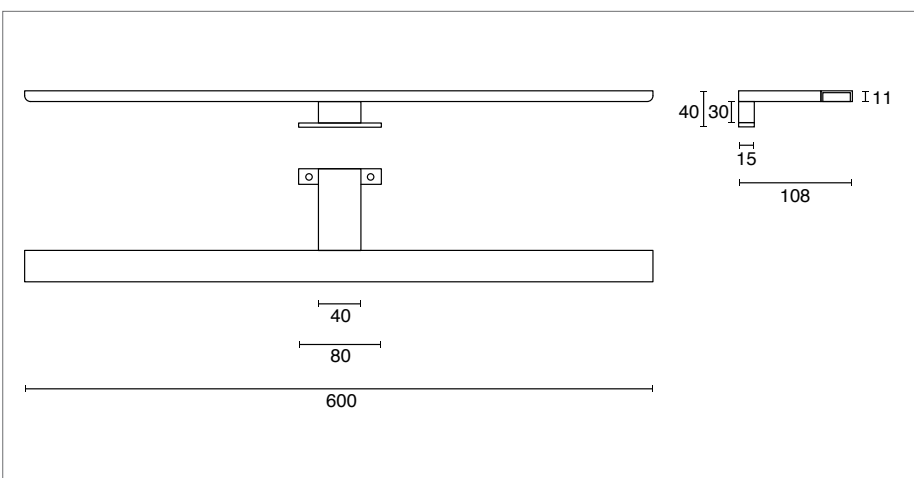

Daylight 600 – 9614

CABINET VERSION

Daylight 600 -
Chrome on Aluminium
8W LED 240V IP44
4000k Natural White Light
Integrated Controller/Driver
(no transformer required)

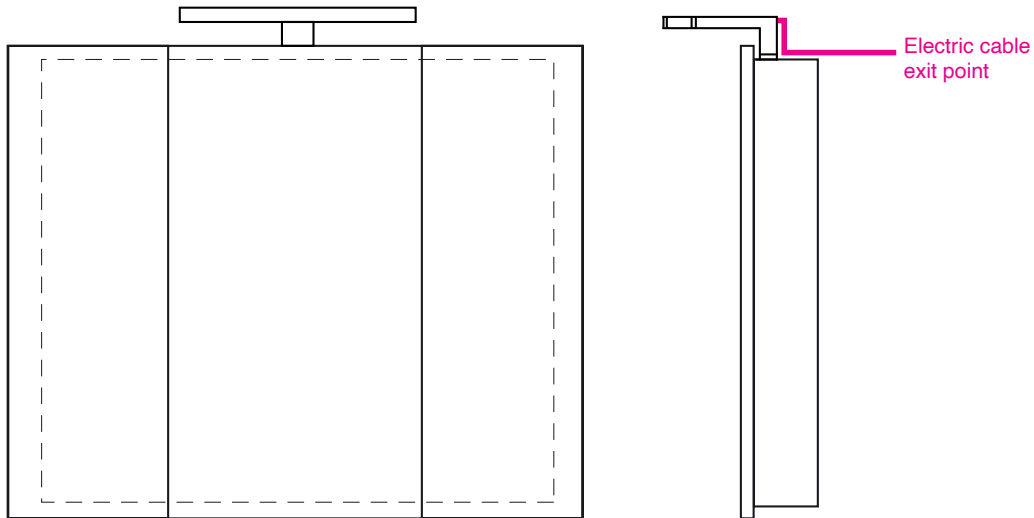

Installation

- 1 / Decide height of mirror, suggested 1940mm above finished floor level. Height should be based on desired height for individual.
- 2 / Attach light to top of mirror cabinet positioned as far forward as possible to achieve maximum clearance from mirror surface.
- 3 / Fit standard junction and connect wiring.

Important



Device is Insulation Class II



This light must be installed in accordance with current AS/NZS wiring rules



For indoor use only. Ta 25°C



This device contains no serviceable parts. If the supply cord is damaged it must be replaced by the manufacturer, its service agent or similar qualified persons in order to avoid potential hazard



Nominal voltage AC 200-240v 50/60 Hz